


**EX CERTIFICATE – cULus**

---

**UL E470829**  
for  
**APF202 24 VDC 5 A power supply**

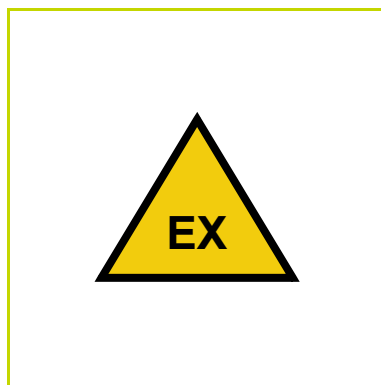

Note: Although the Ex certificate may be included in more than one language, the liability of the notified body applies only on the text of the original copy of the certificate that it published.

Document reference UL E470829  
Edition 1 – September 2019

**THIS PAGE INTENTIONALLY LEFT BLANK**

UL Product iQ™



## NRAD.E470829 - POWER CIRCUIT AND MOTOR-MOUNTED APPARATUS FOR USE IN HAZARDOUS LOCATIONS

### Power Circuit and Motor-mounted Apparatus for Use in Hazardous Locations

See General Information for Power Circuit and Motor-mounted Apparatus for Use in Hazardous Locations

#### WEIDMÜLLER INTERFACE GMBH & CO KG

KLINGENBERGSTR 16

32758 DETMOLD, GERMANY

Class 1, Division 2, Groups A, B, C and D Hazardous Locations

Accessories, control modules, for use with electronic load monitoring module, Model(s): AMG CM EX

Distribution modules, Model(s): AMG DS EX, AMG MD EX, AMG OD EX, AMG PD EX, AMG XMD EX

Feed-in modules, Model(s): AMG FM-0 EX, AMG FM-C EX

Open type electronic load monitoring modules, Model(s): AMG ELM-10F EX, AMG ELM-12 EX, AMG ELM-1F EX, AMG ELM-2F EX, AMG ELM-4F EX, AMG ELM-6 EX, AMG ELM-6F EX, AMG ELM-8F EX

Open type power supplies, Model(s): PRO DCDC 120W 24V 5A, PRO DCDC 240W 24V 10A, PRO DCDC 480W 24V 20A, PRO RM 10, PRO RM 20, PRO RM 40

Open type power supplies, Model(s): PRO TOP1 120W 12V 10A, PRO TOP1 120W 12V 10A F, PRO TOP1 120W 12V 10A EX, PRO TOP1 120W 24V 5A, PRO TOP1 120W 24V 5A F, **PRO TOP1 120W 24V 5A EX**

Open type power supplies, Model(s): PRO TOP1 240W 24V 10A, PRO TOP1 240W 24V 10A F, PRO TOP1 240W 24V 10A EX

Open type power supplies, Model(s): PRO TOP1 480W 24V 20A, PRO TOP1 480W 24V 20A EX, PRO TOP1 480W 48V 10A, PRO TOP1 480W 48V 10A EX

Open type power supplies, Model(s): PRO TOP1 72W 24V 3A, PRO TOP1 72W 24V 3A F, PRO TOP1 72W 24V 3A CO

Open type power supplies, Model(s): PRO TOP1 960W 24V 40A EX, PRO TOP1 960W 48V 20A CO

Open type power supplies, Model(s): PRO TOP1 960W 24V 40A, PRO TOP1 960W 48V 20A

Open-type Switch Mode Power Supply, Model(s): PRO TOP3 120W 24V 5A, PRO TOP3 120W 24V 5A CO, PRO TOP3 240W 24V 10A, PRO TOP3 240W 24V 10A CO, PRO TOP3 480W 24V 20A, PRO TOP3 480W 24V 20A CO, PRO TOP3 480W 48V 10A, PRO TOP3 480W 48V 10A CO, PRO TOP3 960W 24V 40A, PRO TOP3 960W 24V 40A CO, PRO TOP3 960W 36V 26.6A, PRO TOP3 960W 36V 26.6A CO, PRO TOP3 960W 48V 20A, PRO TOP3 960W 48V 20A CO

Switching power supplies, Model(s): PRO MAX 120W 12V 10A, PRO MAX 120W 24V 5A, PRO MAX 180W 24V 7.5A, PRO MAX 240W 24V 10A, PRO MAX 240W 48V 5A, PRO MAX 480W 24V 20A, PRO MAX 480W 48V 10A, PRO MAX 700W 5V 14A, PRO MAX 72W 12V 6A, PRO MAX 72W 24V 3A, PRO MAX 960W 24V 40A, PRO MAX 960W 48V 20A, PRO MAX3 120W 24V 5A, PRO MAX3 240W 24V 10A, PRO MAX3 480W 24V 20A, PRO MAX3 960W 24V 40A

Trademark and/or Tradename:



Last Updated on 2019-02-25

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"



UL Product iQ™

# NRAD7.E470829 - POWER CIRCUIT AND MOTOR-MOUNTED APPARATUS FOR USE IN HAZARDOUS LOCATIONS CERTIFIED FOR CANADA

## Power Circuit and Motor-mounted Apparatus for Use in Hazardous Locations Certified for Canada

See General Information for Power Circuit and Motor-mounted Apparatus for Use in Hazardous Locations Certified for Canada

### WEIDMÜLLER INTERFACE GMBH & CO KG

KLINGENBERGSTR 16

32758 DETMOLD, GERMANY

Class 1, Division 2, Groups A, B, C and D Hazardous Locations

**Accessories, control modules, for use with electronic load monitoring module.** Model(s): AMG CM EX

**Distribution modules.** Model(s): AMG DS EX, AMG MD EX, AMG OD EX, AMG PD EX, AMG XMD EX

**Feed-in modules.** Model(s): AMG FM-0 EX, AMG FM-C EX

**Open type electronic load monitoring modules.** Model(s): AMG ELM-10F EX, AMG ELM-12 EX, AMG ELM-1F EX, AMG ELM-2F EX, AMG ELM-4F EX, AMG ELM-6 EX, AMG ELM-6F EX, AMG ELM-8F EX

**Open type power supplies.** Model(s): PRO DCDC 120W 24V 5A, PRO DCDC 240W 24V 10A, PRO DCDC 480W 24V 20A, PRO RM 10, PRO RM 20, PRO RM 40

**Open type power supplies.** Model(s): PRO TOP1 120W 12V 10A, PRO TOP1 120W 12V 10A F, PRO TOP1 120W 12V 10A EX, PRO TOP1 120W 24V 5A, PRO TOP1 120W 24V 5A F, **PRO TOP1 120W 24V 5A EX**

**Open type power supplies.** Model(s): PRO TOP1 240W 24V 10A, PRO TOP1 240W 24V 10A F, PRO TOP1 240W 24V 10A EX

**Open type power supplies.** Model(s): PRO TOP1 480W 24V 20A, PRO TOP1 480W 24V 20A EX, PRO TOP1 480W 48V 10A, PRO TOP1 480W 48V 10A EX

**Open type power supplies.** Model(s): PRO TOP1 72W 24V 3A, PRO TOP1 72W 24V 3A F, PRO TOP1 72W 24V 3A CO

**Open type power supplies.** Model(s): PRO TOP1 960W 24V 40A EX, PRO TOP1 960W 48V 20A CO

**Open type power supplies.** Model(s): PRO TOP1 960W 24V 40A, PRO TOP1 960W 48V 20A

**Open-type Switch Mode Power Supply.** Model(s): PRO TOP3 120W 24V 5A, PRO TOP3 120W 24V 5A CO, PRO TOP3 240W 24V 10A, PRO TOP3 240W 24V 10A CO, PRO TOP3 480W 24V 20A, PRO TOP3 480W 24V 20A CO, PRO TOP3 480W 48V 10A, PRO TOP3 480W 48V 10A CO, PRO TOP3 960W 24V 40A, PRO TOP3 960W 24V 40A CO, PRO TOP3 960W 36V 26.6A, PRO TOP3 960W 36V 26.6A CO, PRO TOP3 960W 48V 20A, PRO TOP3 960W 48V 20A CO

**Switching power supplies.** Model(s): PRO MAX 120W 12V 10A, PRO MAX 120W 24V 5A, PRO MAX 180W 24V 7.5A, PRO MAX 240W 24V 10A, PRO MAX 240W 48V 5A, PRO MAX 480W 24V 20A, PRO MAX 480W 48V 10A, PRO MAX 70W 5V 14A, PRO MAX 72W 12V 6A, PRO MAX 72W 24V 3A, PRO MAX 960W 24V 40A, PRO MAX 960W 48V 20A, PRO MAX3 120W 24V 5A, PRO MAX3 240W 24V 10A, PRO MAX3 480W 24V 20A, PRO MAX3 960W 24V 40A

Trademark and/or Tradename: Weidmüller

Last Updated on 2019-02-25

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings), 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"